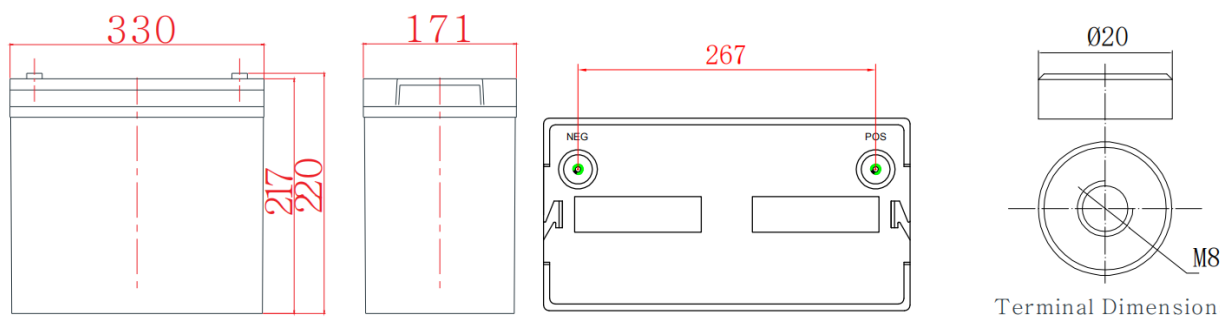


General Features

- ▶ High corrosion resistant performance: Pb-Ca multi-alloy grid
- ▶ High energy density and power density
- ▶ Optimized capability of instant high-current discharging
- ▶ Excellent charge acceptance ability
- ▶ Excellent deep cycle discharge capability
- ▶ Strong high and low temperature performance
- ▶ Precision sealing technology
- ▶ Long life


Dimension: 330(L) × 171(W) × 217(H) × 220(TH) / (±3)
Unit: mm


Terminal Dimensions

Specification

Nominal Voltage	12V
Nominal Capacity	100Ah@10hour-rate to 1.80V per cell @25°C
Design life	10 years
Terminal	M8
Approx. Weight	Approx 29.0kg ± 3% (63.9 ± 3% lbs)
Container Material	ABS (UL94-HB, UL94-V0 Optional)
short-circuit current	2400A
Internal resistance(Full charged at 25°C:)	5.0 mΩ
Self discharge	3% of capacity declined per month at 25°C

Operating Temperature

Discharge:	-20 ~ 50°C (-4 ~ 122°F)
Charge :	-20 ~ 50°C (-4 ~ 122°F)
Storage:	-20 ~ 50°C (-4 ~ 122°F)

Charge Method(25 °C)

Charge current:	Max. 25A; Recom. 10A
Float charge: 13.5-13.8V	recom. 13.8V(-18mV/ °C)
Equalize charge: 13.8-14.1V	recom. 14.1V(-24mV/ °C)
Cycle charge: 14.4-15.0V	recom. 14.7V(-30mV/ °C)

Standards

 Executive standard: IEC 60896-21/22,
 GB/T 19638.1-2014

Applications

- ▶ UPS/EPS
- ▶ Power systems
- ▶ Telecommunications system
- ▶ Emergency lighting, Auto control system
- ▶ Solar/wind generating storage cyclic
- ▶ Other general purpose


Rated Capacity

10Hour Rate (10.0A to 10.8V)	100.0Ah
3Hour Rate (26.6A to 10.2V)	79.8Ah
1Hour Rate (63.2A to 9.6V)	63.2Ah


Attain Certificate

	RoHS


Discharge characteristic

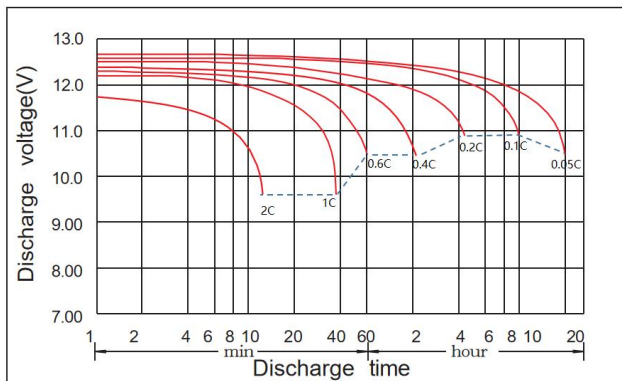


Charging characteristic

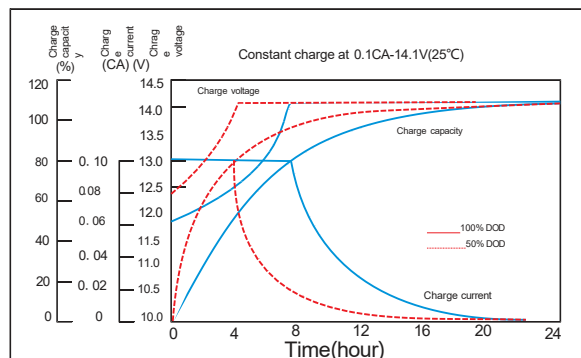

The effect of temperature on capacity

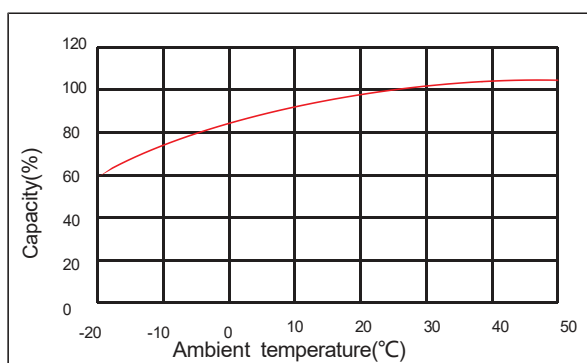

The effect of temperature on float life

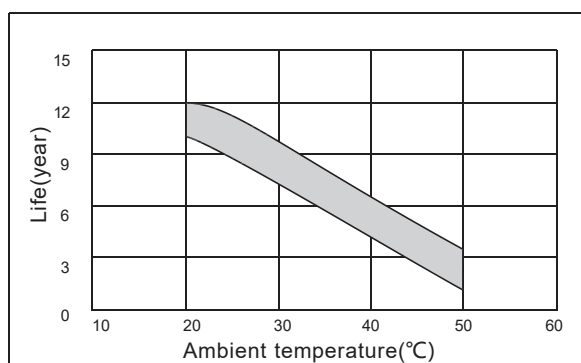

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)

FV/Time	15min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	184.5	109.5	80.2	63.2	47.0	37.5	28.2	22.7	19.3	16.4	12.7	10.5	5.52
1.65V	177.3	105.1	77.0	60.8	45.6	36.7	27.3	22.0	18.8	16.2	12.5	10.4	5.43
1.70V	166.0	100.5	73.6	58.2	43.8	35.1	26.6	21.5	18.3	15.9	12.3	10.3	5.38
1.75V	154.5	95.1	70.3	56.4	42.0	33.9	25.8	21.0	17.9	15.5	12.2	10.1	5.35
1.80V	145.5	92.5	67.8	54.0	40.0	32.8	25.5	20.4	17.4	15.0	12.0	10.0	5.30
1.85V	120.7	78.3	59.2	47.4	36.2	29.1	22.4	18.5	15.9	13.7	11.2	9.2	5.08

Constant Power Discharge Characteristics Unit: W/cell (25°C, 77°F)

FV/Time	15min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	324.1	198.9	145.9	115.8	87.0	69.0	53.2	42.6	36.4	31.6	24.8	20.7	10.9
1.65V	314.5	193.0	141.2	112.5	84.8	67.8	52.4	41.6	35.6	31.3	24.5	20.5	10.7
1.70V	298.9	186.3	139.5	109.6	83.6	65.6	50.2	40.6	34.8	30.6	24.2	20.2	10.6
1.75V	282.2	179.9	133.8	107.2	81.2	63.9	49.9	39.7	34.0	29.9	23.9	20.0	10.6
1.80V	266.9	173.7	128.7	102.8	77.0	62.8	48.6	39.3	33.2	29.4	23.6	19.8	10.5
1.85V	222.4	151.1	114.4	91.9	71.6	57.5	43.6	36.1	31.1	26.9	22.2	18.6	9.87