

# JS12-20




## JS Series lead-acid battery

### General Features

- > High corrosion resistant performance: Pb-Ca multi-alloy grid
- > High energy density and power density
- > Optimized capability of instant high-current discharging
- > Excellent charge acceptance ability
- > Excellent deep cycle discharge capability
- > Strong high and low temperature performance
- > Precision sealing technology



Dimension: 181(L)×76(W)×167(H)×167(TH) Unit: mm

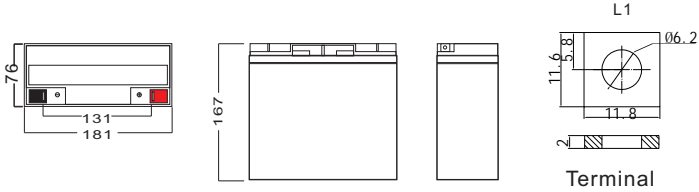

### Applications

- > UPS/EPS
- > Power systems
- > Telecommunications system
- > Emergency lighting、Auto control system
- > Solar/wind generating storage cyclic
- > Other general purpose

### Specification

Nominal Voltage	12V
Nominal Capacity	20.0Ah
Design life	5 years
Terminal	L1
Approx. Weight	Approx5.50kg (12.1lbs)
Container Material	ABS
Rated Capacity	<b>20.0Ah</b> 20Hour Rate (1.00A to 10.5V)
	<b>15.8Ah</b> 3Hour Rate (5.26A to 10.2V)
	<b>13.2Ah</b> 1Hour Rate (13.2A to 9.60V)
Internal resistance	Full charged at 25°C: 17.0 mΩ
Max. Discharge Current	300A(5S)
Operating Temperature	Discharge: -20 ~50°C(-4~ 122°F)
	Charge: -20 ~50°C(-4~ 122°F)
	Storage: -20 ~50°C(-4~ 122°F)
Charge current:	Max. 5.00A ; Recom.2.00A
Charge Method (25 °C)	Float Charge:13.5-13.8V,recom.13.8V(-18mV/ °C)
	Equalize charge:13.8-14.1V,recom.14.1V(-24mV/ °C)
	Cycle charge:14.4-15.0V,recom.14.7V(-30mV/ °C)
Self discharge	3% of capacity declined per month at 25°C

### Constant Current Discharge Characteristics Unit: A (25°C, 77°F)


FV/Time	5min	10min	15min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	79.2	51.8	38.6	25.3	16.2	13.2	8.05	7.56	5.52	4.42	3.76	2.85	2.48	1.98	1.06
1.65V	78.6	49.6	35.4	24.0	15.2	12.4	7.97	7.26	5.36	4.28	3.68	2.83	2.44	1.96	1.04
1.70V	64.4	46.6	33.0	23.3	14.7	12.0	7.81	7.12	5.26	4.06	3.64	2.77	2.40	1.92	1.02
1.75V	59.8	44.4	30.8	22.7	14.2	11.6	7.65	6.94	5.18	4.00	3.48	2.71	2.34	1.88	1.00
1.80V	55.0	41.8	28.6	22.0	13.7	11.2	7.48	6.76	4.90	3.92	3.34	2.65	2.28	1.84	0.96
1.85V	49.1	38.7	25.4	20.2	12.7	10.4	7.26	6.43	4.61	3.80	3.19	2.57	2.19	1.78	0.94

### Constant Power Discharge Characteristics Unit: W/cell(25°C, 77°F)


FV/Time	5min	10min	15min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	149	93.3	70.7	42.7	29.0	24.2	16.2	14.2	10.4	8.37	7.10	5.63	4.68	3.84	2.10
1.65V	137	88.3	66.3	42.4	27.4	22.8	15.9	13.6	10.1	8.10	6.97	5.51	4.61	3.76	2.04
1.70V	125	85.7	63.3	42.3	26.5	22.1	15.7	13.4	10.0	7.70	6.77	5.47	4.56	3.73	2.03
1.75V	114	83.0	61.0	41.9	25.7	21.4	15.4	13.1	9.83	7.60	6.63	5.35	4.38	3.65	1.98
1.80V	102	80.3	58.3	41.6	25.3	21.1	15.1	13.0	9.57	7.53	6.47	5.24	4.23	3.57	1.97
1.85V	91.0	75.1	52.2	38.1	23.7	19.7	14.8	12.4	9.11	7.41	6.17	5.15	4.05	3.51	1.95

**JS12-20**


**Discharge characteristic**

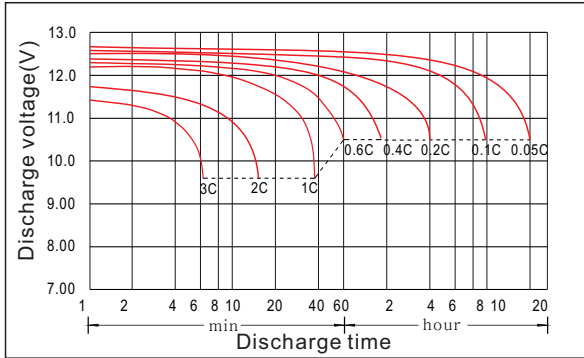


**Charging characteristic**

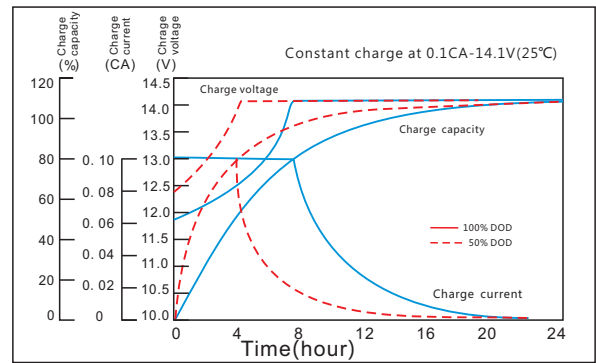


**The effect of temperature on capacity**

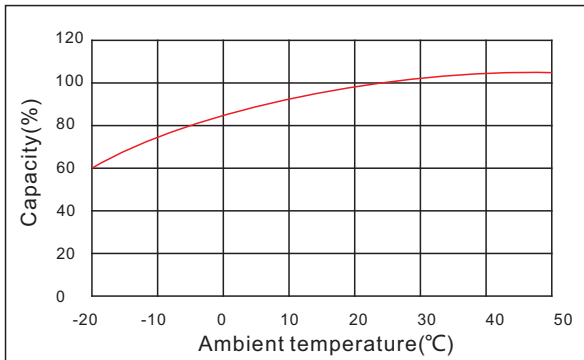


**The effect of discharge depth on cycle life**

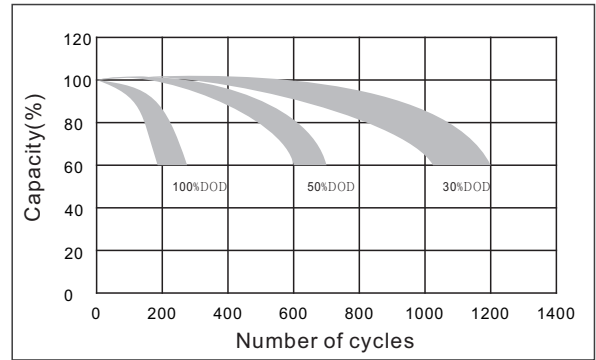

**Curves of self-discharge**

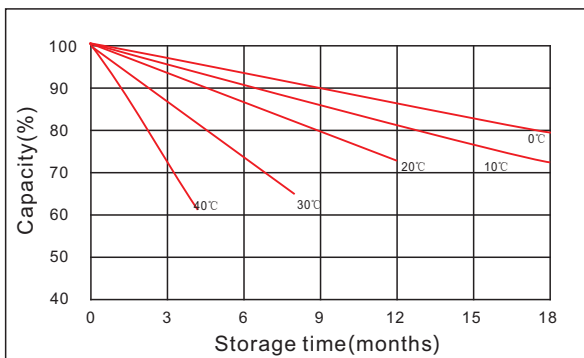

**The effect of temperature on float life**

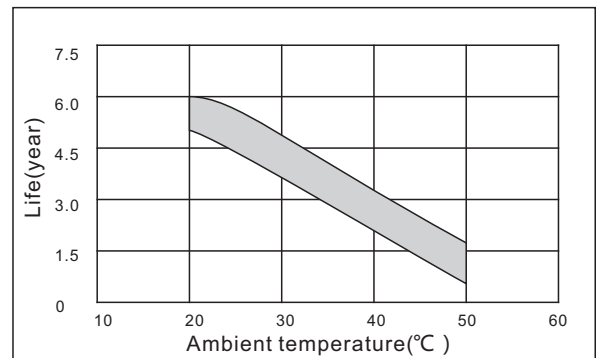

[www.kijo.com.cn](http://www.kijo.com.cn)    [info@kijo.com.cn](mailto:info@kijo.com.cn)

**Jiangxi Jingjiu Power Science&Technology Co. Ltd.**  
Add: 1388 Fushan No.1 Street, Xiaolan Economic Development Zone, Nanchang City, Jiangxi Province, China.

+86-791-85982779    +86-791-85989842

**Jiangxi Jingjiu Power ( Jiujiang ) Co. Ltd.**  
Add: Xiwang Rd, Aicheng Industrial Park, Yongxiu Country, Jiujiang City, Jiangxi Province, China.

